
BUILT-IN ANODISED ALUMINIUM TABLE LIFT




Credit: Noval

This anodized aluminium system allow the raising and lowering of a table top, which becomes invisible in its lowered position, flush with the floor.

Scan here for more information!
www.noval-marine.com

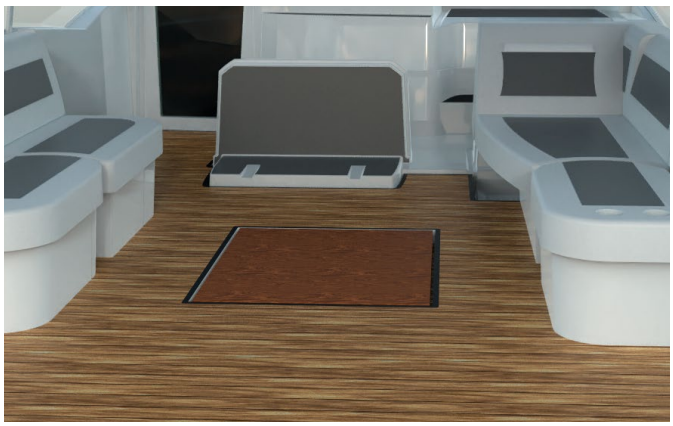

Credit: Noval

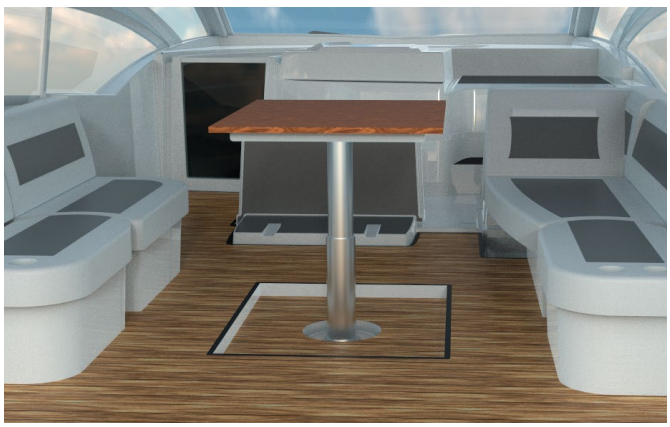


Credit: Noval

GENERAL DESCRIPTION

- Optimal integration allowing the table to be lowered down to the floor.
- Possible options:
  - remote control,
  - converter (DC/DC)
  - power supply
  - switch
  - control box
- Outdoor environment compatible.
- Finish anodised alumnium.
- Synchronozation possible between two table lifts (to be specified when ordering).

Cylindrical built-in model

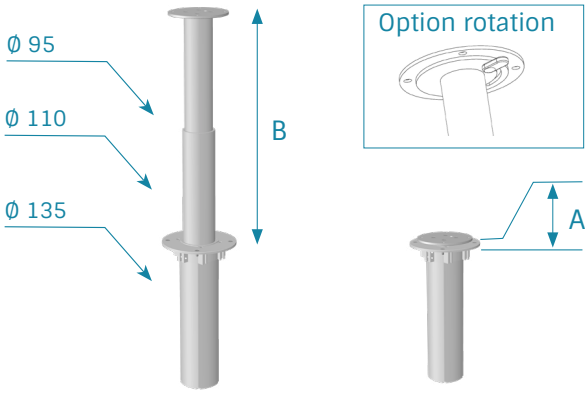

| ALUMINIUM 3 PART CYLINDRICAL BUILT-IN STANDARD MODELS

Reference	Finish	Dimensions								Speed		Load			Power supply		IP Grade
		Retracted height A (mm)	Deployed height B (mm)	Recessing height C (mm)	Stroke (mm)	Rotation option	Lower plate dimensions (mm)	Upper plate dimensions (mm)	Installation orientation	No load speed (mm/s)	Full load speed (mm/s)	Dynamic bending moment (Nm)	Static bending moment (Nm)	Compression load (N)	Voltage (V)	Max current (A)	
NL3290	Grey anodized	25	800	540	775	NO	Ø 255	Ø 200	Standard	30	18,4	250	500	1000	12	10	IPX6
NL3291	Grey anodized	25	800	540	775	NO	Ø 255	Ø 200	Standard	30	18,4	250	500	1000	24	5	IPX6
NL3604	Grey anodized	25	800	540	775	NO	400 x 250	400 x 250	Standard	30	18,4	250	500	1000	12	10	IPX6
NL3605	Grey anodized	25	800	540	775	NO	400 x 250	400 x 250	Standard	30	18,4	250	500	1000	24	5	IPX6
NL3332	Grey anodized	45	820	540	775	YES	Ø 255	Ø 270	Standard	30	18,4	250	500	1000	12	10	IPX6
NL3333	Grey anodized	45	820	540	775	YES	Ø 255	Ø 270	Standard	30	18,4	250	500	1000	24	5	IPX6